
## SCIOTO VALLEY PRECAST COMPANY


3218 S. BRIDGE STREET

CHILLICOTHE, DHIO 45601

PHONE (740) 663-2659

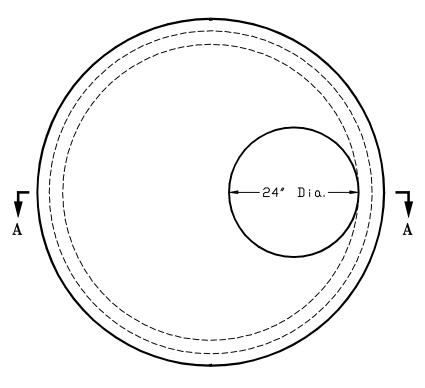

## TOP VIEW

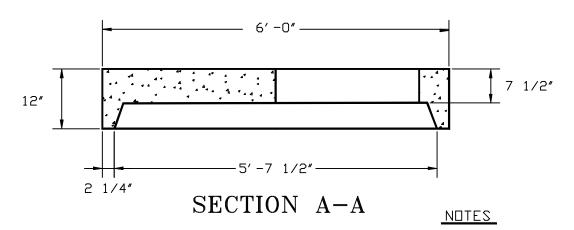

## SPECIFICATIONS

REINFORCING SHALL CONFORM TO A. S. T. M. DESIGNATION C-478 PRECAST, REINFORCED, CONCRETE SECTIONS.

JOINTS TO CONFORM TO AASHTO M198 A) Rubber Gasket Or

B) Flexible Plastic Gaskets

STEPS SHALL BE MA INDUSTRIES PS1-PF INSTALLED 12" ON CENTERS.

JOINT GASKET SHALL BE BY HAMILTON-KENT RUBBER GASKET ASTM C-443 AND C-361 SECTIONS.

JOINT SEALANT- CONSEAL BY CONCRETE SEALANTS

PIPE GASKET TO BE
A-LOCK × CEL
OR
A-LOK G3 BOOT
OR
NPC KOR-N-SEAL I OR II
FLEXIBLE BOOT

PRECAST FLOW CHANNEL AVAILABLE

INSIDE DROP BY RECLINER AVAILABLE